


Weight

SPECIFICATIONS

| Dimension | Metric | British |
|---------------------------------|-------------|------------------|
| Max. Working Height | 12.40m | 40ft 8in |
| Max. Platform Height | 10.40m | 34ft 1in |
| Overall Length A | 3.82m | 12ft 6in |
| Overall Width B | 1.50m | 4ft 11in |
| Overall Height C | 1.99m | 6ft 6in |
| Max. Horizontal Reach | 5.50m | 18ft |
| Max. Up And Over Clearance | 7.00m | 23ft |
| Platform Size(Length ×Width) | 0.75m×1.50m | 2ft 5in×4ft 11in |
| Ground Clearance(Raised/Stowed) | 0.1m/0.015m | 4in/1in |
| Wheelbase | 1.60m | 5ft 3in |
| Turning Radius(Inside/Outside) | 1.00m/2.80m | 3ft 3in/9ft 2in |
| Tyres D | Ф470×178mm | Ф470×178mm |

| Performance | | |
|--------------------------------|-----------|-----------|
| S.W.L | 250kg | 551lb |
| Max. Occupants(Indoor/Outdoor) | 2 | 2 |
| Gradeability | 25% | 25% |
| Travel Speed(Stowed) | ≯4.5km/h | ≯2.80mph |
| Travel Speed(Raised) | ≯0.5km/h | ≯0.31mph |
| Max. Working Slope(X/Y) | 2.5°/2.5° | 2.5°/2.5° |
| Up/Down Speed | 42/37sec | 42/37sec |
| Turret Rotation | 345° | 345° |
| Jib Movement | 60°∼-60° | 60°~-60° |
| Platform Rotation | ±60° | ±60° |

| Overall Weight | 4970kg | 10957lb |
|------------------------------------|---------------|---------------|
| Power | | |
| Lead-Acid Maintenance-Free Battery | 48V/200Ah | 48V/200Ah |
| Charger | 48V/35A | 48V/35A |
| Driving Motor | 2×32VAC/2.0kW | 2×32VAC/2.0kW |
| Lifting Motor | 30VAC/5.0kW | 30VAC/5.0kW |

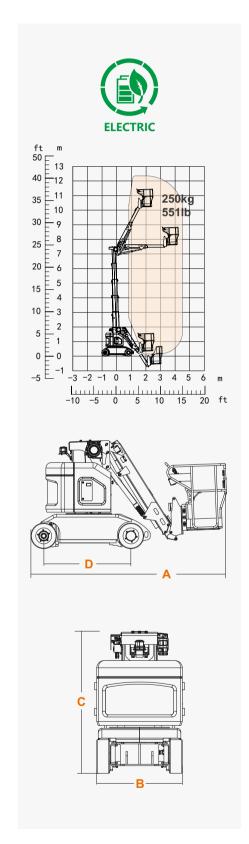



Self-propelled Mast Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Drivable At Full Height
- Automatic Braking System
- Emergency Descent System
- Emergency Stop Button
- Fault Diagnosis System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing Beacon
- · Overload alarm system



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











