


SPECIFICATIONS

Metric	British
15.00m	49' 3"
13.00m	42' 8"
13.00m	42' 8"
4.88m	16'
2.33m	7' 8"
3.02m	9' 11"
2.26m	7' 5"
4.88m×1.83m	16'×6'
1.43m/1.13m	4' 8"/3' 8"
0.30m	1'
2.86m	9' 5"
2.70m/5.50m	8' 10"/18'
315/55/D20	315/55/D20
	15.00m 13.00m 13.00m 4.88m 2.33m 3.02m 2.26m 4.88m×1.83m 1.43m/1.13m 0.30m 2.86m 2.70m/5.50m

Performance		
S.W.L	680kg	1499lb
S.W.L on Extension	227kg	500lb
Max. Occupants(Indoor/Outdoor)	7/7	7/7
Gradeability	40%	40%
Travel Speed(Stowed)	≯6.0km/h	≯3.73mph
Travel Speed(Raised)	≯1.0km/h	≯0.62mph
Max. Working Slope(X/Y)	2°/3°	2°/3°
Up/Down Speed	70/62sec	70/62sec

Weight		
Overall Weight(Without Outriggers)	7340kg	16182lb
Overall Weight(With Outriggers)	8240kg	18166lb

Power		
Range Extended Engine	Kubota Z482/9.8kW	Kubota Z482/9.8kW
Diesel Tank	110L	29gal
Hydraulic Tank	80L	21gal
Lithium Battery	48V/350Ah	48V/350Ah
Charger	48V/60A	48V/60A
Driving Motor	32VAC/9kW	32VAC/9kW
Lifting Motor	32VAC/15kW	32VAC/15kW

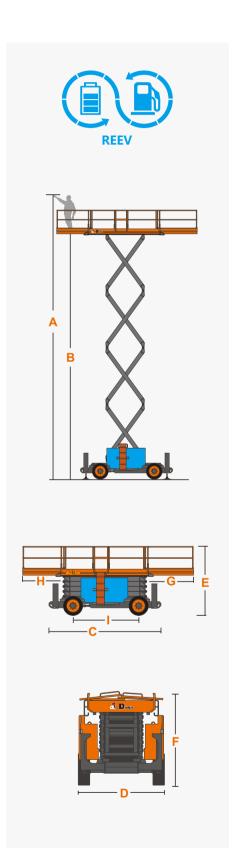



Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Drive axle
- Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











