


## SPECIFICATIONS

| Size                                     | Metric      | British          |
|------------------------------------------|-------------|------------------|
| Max. Working Height <b>A</b>             | 15.00m      | 49ft 3in         |
| Max. Platform Height <b>B</b>            | 13.00m      | 42ft 8in         |
| Overall Length(Without Outriggers)       | 3.98m       | 13ft 1in         |
| Overall Length(With Outriggers) <b>C</b> | 4.88m       | 16ft             |
| Overall Width <b>D</b>                   | 2.33m       | 7ft 8in          |
| Overall Height(Rails Up) <b>E</b>        | 3.02m       | 9ft 11in         |
| Overall Height(Rails Down) <b>F</b>      | 2.26m       | 7ft 5in          |
| Platform Size(Length×Width)              | 4.88m×1.83m | 16ft×6ft         |
| Platform Extension Size <b>G/H</b>       | 1.43m/1.13m | 4ft 8in/3ft 10in |
| Ground Clearance                         | 0.30m       | 1ft              |
| Wheelbase <b>I</b>                       | 2.86m       | 9ft 5in          |
| Turning Radius(Inside/Outside)           | 2.70m/5.50m | 8ft 10in/18ft    |
| Tyres                                    | 315/55/D20  | 315/55/D20       |

| Performance                     |          |          |
|---------------------------------|----------|----------|
| S.W.L                           | 680kg    | 1499lb   |
| S.W.L On Extension              | 227kg    | 500lb    |
| Max. Occupants (Indoor/Outdoor) | 7/7      | 7/7      |
| Gradeability                    | 40%      | 40%      |
| Travel Speed(Stowed)            | ≥5.0km/h | ≥3.1mph  |
| Travel Speed(Raised)            | ≥1.0km/h | ≥0.62mph |
| Max. Working Slope(X/Y)         | 2°/3°    | 2°/3°    |
| Up/Down Speed                   | 73/62sec | 73/62sec |

| Weight                             |        |         |
|------------------------------------|--------|---------|
| Overall Weight(Without Outriggers) | 7100kg | 15653lb |
| Overall Weight(With Outriggers)    | 8000kg | 17637lb |

| Power          |                |                |
|----------------|----------------|----------------|
| Diesel Engine  | 18.2kW/3000rpm | 18.2kW/3000rpm |
| Diesel Tank    | 80L            | 21gal          |
| Hydraulic Tank | 120L           | 31gal          |

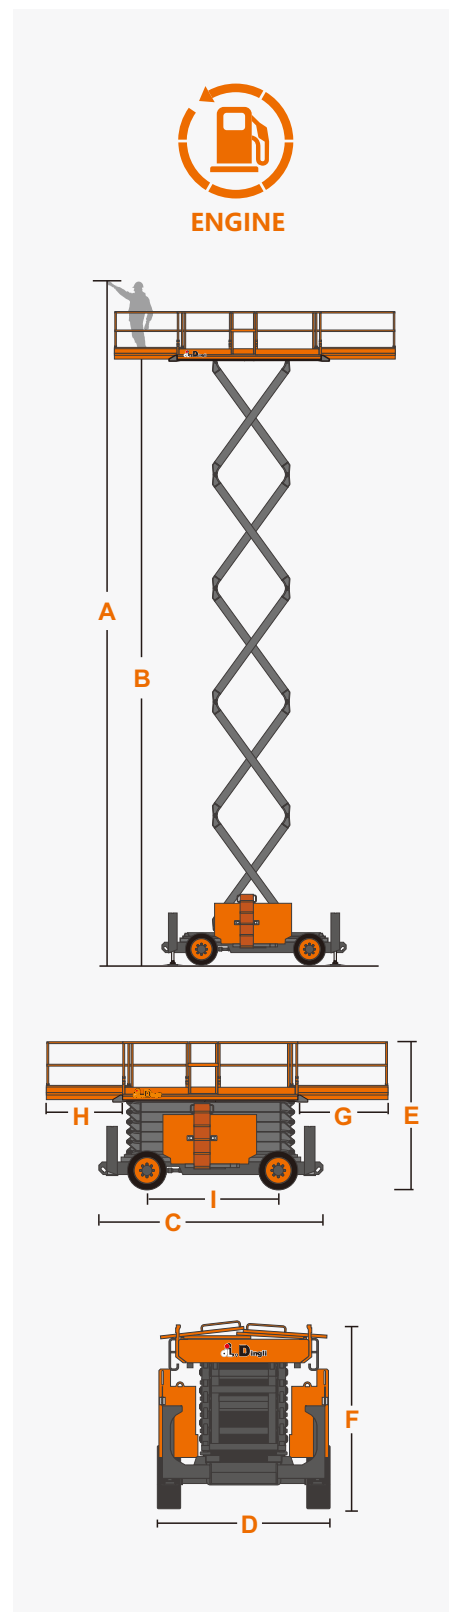

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Drive axle
- Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: [export@cndingli.com](mailto:export@cndingli.com)

[Https://en.cndingli.com](https://en.cndingli.com)

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03

