


SPECIFICATIONS

Size	Metric	British
Max. Working Height 🛕	9.60m	31ft 6in
Max. Platform Height B	7.60m	24ft 11in
Overall Length ©	1.88m	6ft 2in
Overall Width D	0.81m	2ft 8in
Overall Height(Rails Up)	2.32m	7ft 7in
Overall Height(Rails Down)	1.99m	6ft 6in
Platform Size(Length×Width)	1.73m×0.74m	5ft 8in×2ft 5in
Platform Extension Size G	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.09m/0.016m	4in/1in
Wheelbase (1)	1.40m	4ft 7in
Turning Radius(Inside/Outside)	0m/1.70m	0m/5ft 7in
Tyres	φ323×125mm	φ323×125mm

Performance		
S.W.L	230kg	507lb
S.W.L On Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/0	2/0
Gradeability	25%	25%
Travel Speed(Stowed)	4.5km/h	2.80mph
Travel Speed(Raised)	0.6km/h	037mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	35/45sec	35/45sec

Weight			
Overall Weight	2180kg	4806lb	

11L	2.7gal
24V/185Ah	24V/185Ah
24V/180Ah	24V/180Ah
24V/30A	24V/30A
2×24VAC/0.5kW	2×24VAC/0.5kW
24VAC/3.0kW	24VAC/3.0kW
	24V/185Ah 24V/180Ah 24V/30A 2×24VAC/0.5kW

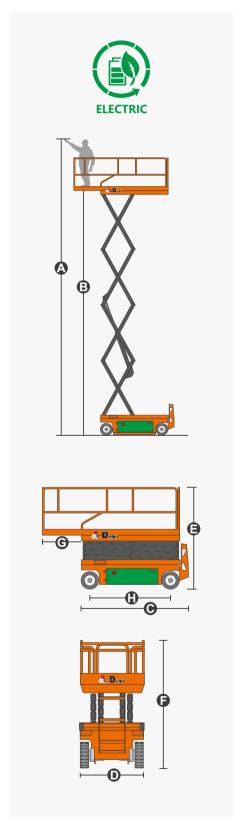

CE EN 280



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











