


SPECIFICATIONS

Dimension	Metric	British
Max. Working Height A	8.00m	26ft 3in
Max. Platform Height B	6.00m	19ft 8in
Overall Length C	2.48m	8ft 2in
Overall Width D	1.15m	3ft 9in
Overall Height(Rails Up) E	2.23m	7ft 4in
Overall Height(Rails Down) F	1.70m	5ft 7in
Platform Size(Length ×Width)	2.27m×1.12m	7ft 5in×3ft 8in
Platform Extension Size G	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase H	1.87m	6ft 2in
Turning Radius(Inside/Outside)	0m/2.20m	0in/7ft 3in
Tyres	φ381×127mm	φ381×127mm

540kg 1191lb
113kg 249lb
door/Outdoor) 2/2 2/2
25% 25%
ed) 6.0km/h 3.73mph
d) 0.8km/h 0.50mph
e(X/Y) 1.5°/3° 1.5°/3°
31/30sec 31/30sec
25% 25% 25% 25% 3.73mph 3.73mph dl) 0.8km/h 0.50mph e(X/Y) 1.5°/3° 1.5°/3°

Weight			
Overall Weight	1990kg	4387lb	

Power		
Hydraulic Tank	20L	5.3gal
Lithium Battery	28.8V/150Ah	28.8V/150Ah
Charger	28V/30A	28V/30A
Driving Motor	2×15VAC/0.87kW	2×15VAC/0.87kW
Lifting Motor	15VAC/3.42kW	15VAC/3.42kW

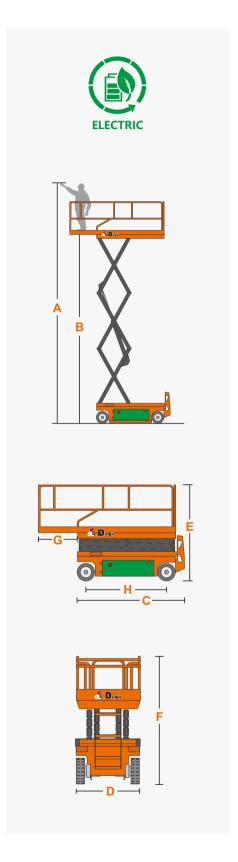



FEATURES

Standard Items

- Proportional Joystick Controls Tie-Down And Lifting Points
- Self-lock Gate On Platform
- Drivable At Full Height
- Non-Marking Tires
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Brake System
- Emergency Descent System • Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- One-Way Platform Extension Deck
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point



- Platform Load Sense System
- Emergency Stop Button
- Hydraulic oil receiver
- Pure electric steering system
- · Kinetic energy recovery system



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











