


## **SPECIFICATIONS**

Size	Metric	British
Max.Working Height <b>A</b>	7.60m	24ft 11in
Max.Platform Height <b>B</b>	5.60m	18ft 8in
Overall Length <b>©</b>	1.63m	5ft 4in
Overall Width <b>(</b>	0.80m	2ft 7in
Overall Height 📵	1.99m	6ft 6in
Platform Size(Length/Width)	1.03m×0.76m	3ft 5in×2ft 6in
Platform Extension Size	0.50m	1ft 8in
Ground Clearance(Stowed/Raised)	0.06m/0.014m	2in/1in
Wheelbase <b>(5</b> )	1.21m	4ft
Turning Radius(Inside/Outside)	0.60m/1.80m	2ft/5ft 11in
Tyres	Ф230×100mm	Ф230×100mm

Performance		
S.W.L	227kg	500lb
S.W.L On Extension	113kg	249lb
Max. Occupants(Indoor/Outdoor)	2/0	2/0
Gradeability	25%	25%
Max. Working Slope	3.6km/h	2.20mph
Travel Speed(Stowed)	0.5km/h	0.31mph
Travel Speed(Raised)	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	32/32sec	32/32sec

Weight		
Weight	1310kg	2888lb

Power		
Battery	2×12V/115Ah	2×12V/115Ah
Charger	24V/15A	24V/15A
Drive Motor	2×24VAC/0.68kW	2×24VAC/0.68kW
Lifting Motor	24VDC/1.40kW	24VDC/1.40kW

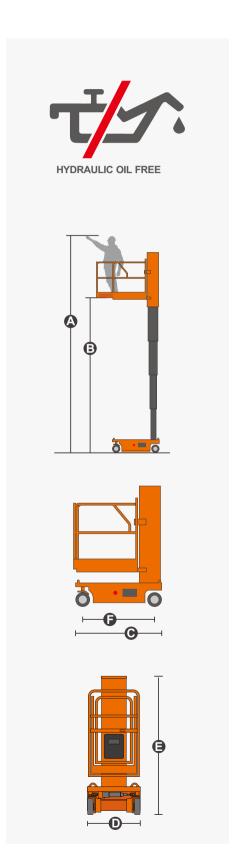

MV060-ACE



## **FEATURES**

## **Standard Items**

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tires
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Fault Diagnosis System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











