


SPECIFICATIONS

Size	Metric	British
Max. Working Height A	15.00m	49ft 3in
Max. Platform Height 3	13.00m	42ft 8in
Overall Length(Without Outriggers)	3.98m	13ft 1in
Overall Length(With Outriggers) ©	4.88m	16ft
Overall Width ①	2.33m	7ft 8in
Overall Height(Rails Up)	3.02m	9ft 11in
Overall Height(Rails Down)	2.26m	7ft 5in
Platform Size(Length×Width)	3.98m×1.83m	13ft 1in ×6ft
Platform Extension Size @ /	1.43m/1.13m	4ft 8in/3ft 10in
Ground Clearance	0.30m	1ft
Wheelbase ①	2.86m	9ft 5in
Turning Radius(Inside/Outside)	2.70m/5.50m	8ft 10in/18ft
Tyres	315/55/D20	315/55/D20

Performance		
S.W.L	680kg	1499lb
S.W.L On Extension	227kg	500lb
Max. Occupants (Indoor/Outdoor)	7/7	7/7
Gradeability	40%	40%
Travel Speed(Stowed)	5.0km/h	3.1mph
Travel Speed(Raised)	1.0km/h	0.62mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	73/62sec	73/62sec

Weight			
Overall Weight	8000kg	17637lb	

Power		
Diesel Engine	18.2kW/3000rpm	18.2kW/3000rpm
Diesel Tank	100L	26gal
Hydraulic Tank	120L	31gal

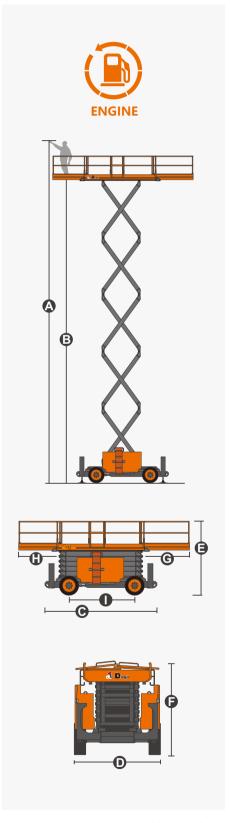

CE EN 280



Self-propelled Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Drive axle
- Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- · Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











