


# **SPECIFICATIONS**

Size	Metric	British
Max. Working Height	15.60m	51ft 2in
Max. Platform Height	13.60m	44ft 7in
Max. Front Outreach(Outriggers Extension)	8.46m	27ft 9in
Max. Rear Outreach(Outriggers Extension)	4.66m	15ft 4in
Max. Platform Slide	1.51m	4ft 11in
Overall Length (A	7.35m	24ft 1in
Overall Width(Stowed)	2.50m	8ft 2in
Overall Width(Transport)	2.31m	7ft 7in
Overall Height(Rails Up)	3.55m	11ft 8in
Overall Height(Rails Down)	2.62m	8ft 7in
Overall Height(Transport)	2.37m	7ft 9in
Platform Size(Length <b>①</b> ×Width <b>②</b> )	6.70m×2.24m	22ft× 7ft 4in
Ground Clearance	0.32m	1ft 1in
Wheelbase	3.80m	12ft 6in
Turning Radius(Inside/Outside)	2.45m/5.50m	8ft/18ft 1in
Tyres	355-55/D625	355-55/D625

Performance		
S.W.L	1800kg	3968lb
Max. Goods Loading	1350kg	2976lb
Max. Occupants	4	4
Platform Swing Angle	+/-90°	+/-90°
Gradeability	40%	40%
Travel Speed(Stowed)	6.0km/h	3.73mph
Travel Speed(Raised)	0.9km/h	0.56mph
Max.Working Slope	X-3°/Y-5°	X-3°/Y-5°
Chassis Leveling	10°	10°

Weight			
Overall Weight	13350kg	29431lb	

Power		
Diesel Engine	Deutz TD2.9 L4/55.4kW	Deutz TD2.9 L4/55.4kW
Hydraulic Oil Tank	216L	57gal

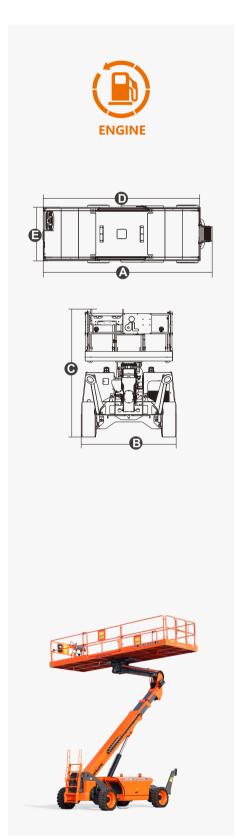



## **FEATURES**

### **Standard Items**

- Proportional Controls
- Manual Safety Pump
- Hour Meter
- Tilt Sensor
- 180° Platform Rotation

#### Slide Platform

- Self-leveling Platform
- Anti-restart Engine Protection
- The Glow Plugs For Cold Starting

Chassis Auto-leveling

Oscillating Axle

**Automatic Outriggers** 

- EuropeanⅢEmission Engine
- Foam-filled Tyres
- · Four-Wheel Steering
- Four-Wheel Drive
- Onboard Diagnostic System
- All Motion Alarm
- Horn
- Flashing Beacon
- Hydraulic Oil Cooler



#### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











